


VS28C

用户手册/User'manual



P/N:060200000231000
060200000231001

VS28C是专门为固定安装设计的超低频音箱。音箱额定阻抗为 4Ω ，音乐功率承受量有4800W，最大140dB的峰值高声压输出（1米距离地面自由场测量）
音箱采用桦木隼拼结构全加固的箱体，环保砂质纹理涂层，彰显其专业属性。
音箱可正反两个方向进行堆叠，为超低频阵列创造物理条件。

The VS28C are dual 18" subwoofers for fixed installations. The speaker impedance is 4 ohms, the program power is up to 4800W, the sound pressure can be output up to 140dB (single box 1 meter distance measurement). The speaker is made of birch wood reinforced box, environmentally friendly sand texture coating, Demonstrate its professional attributes. Positive and negative superposition can be achieved orientation create conditions for installation to meet subwoofer array requirements.

电声指标 Acoustics

节目承受功率 Power handling capacity:4800W(Program)
额定阻抗 Z_{nom} :4 ohm
频宽 Frequency Response:36~250Hz (-6dB)
最大声压 Max SPL: > 140dB (peak)
(半空间下1米处的峰值水平Peak level at 1 m under half space)
扬声器单元 Drivers
2x18" 铁磁4"音圈
2x18" Ferrite driver (V.C:4")

接线 Connector

1xNEUTRIK® NL4 SPEAKON
输入INPUT:±1 并联 THRU ±2

箱体 Cabinet


数控加工，入隼拼接，波罗的海桦木多层胶合板
聚脲耐磨环保喷漆涂层
CNC,tongue and groove cabinet,Baltic birch plywood
Polyurea paint

产品尺寸Product dimension(mm):W1065xH561xD780
净重 N.W:87kg/192lb


包装尺寸Packing dimension(mm):W1100xH615xD816
毛重 G.W:92kg/203lb

以上是不含托板的重量和尺寸
The weight and size of the pallet are not included

输入板 Input Panel:

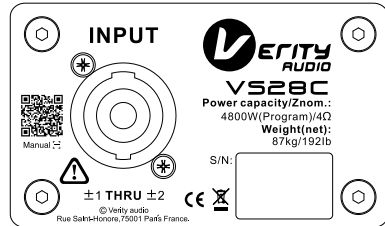

输入接线:±1/±2并联
INPUT:±1 THRU ±2

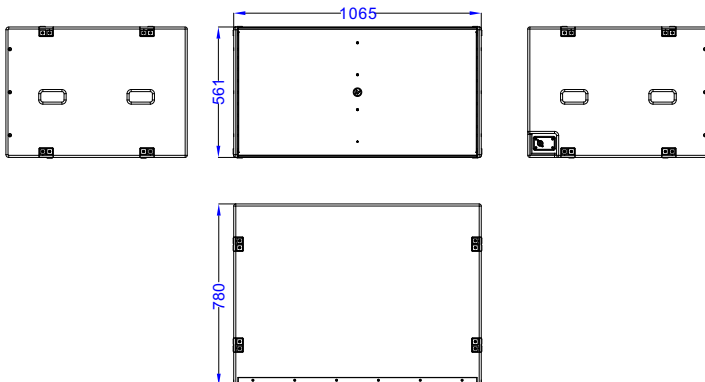



Verity Audio reserves the right to make any changes to the product specifications without prior notice.