



For further information, please scan the QR code.

VOICE12v

VOICE15v


VOICE10v



VOICEv series is special design for reinforcement of KTV and entertainment applications. The tune is a biological tissue sound. Tune sounds with specific frequency response curve which is different from other musical Instruments. And VOICEv series is a frequent speaker for this specific frequency response curve and optimization development. The development products for KTV, VOICEv series can delicately restore each frequency's voice of tune, loud and gentle, not harsh. In addition, VOICEv series has BOOST (Voice enhancement mode) mode and FLAT (Normal mode) mode for your selection. The whole box has 20 M8 hanging points for convenient hanging using for different scenarios. Also you can choose different levels of vertical radiation angle according to your need because of high frequency horn rotation design.

Install & application

- Install speaker with flying ring**
 Through the holes, with rings, can safely and stably adjust the angle you need.
- Install speaker with bracket**
 Through the holes, with hanging accessories, can safely and stably adjust the angle you need.

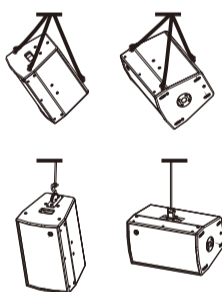

VOICE10v specifications

Acoustics

Power	250W (AES)
Program power	500W
Nominal impedance	8 Ω
Frequency response	55Hz~20kHz(-10dB)
Sensitivity	98dB/W/m
Maximum SPL	>127dB
Horizon	80°
Vertical	50°
LF driver	1X10" driver
Voice coil	2"
HF driver	1X 1.73" compression driver
Voice coil	1.73"

Connector


2x NEUTRIK® Speakon NL4(±1 Link, ±2 Input)

Cabinet

CNC made 15mm birch multi-layer plywood sand texture and weather-resisting protection paint

Hanging side frame

20 x M8 flying points

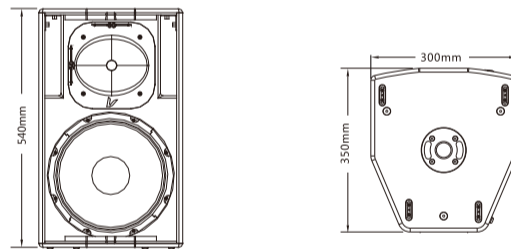

N.W/G.W 13.2kg / 15.7kg
 Product / Package Dimensions W350xH540xD300mm / W460xH655xD410mm

VOICE12v specifications

Acoustics

Power	450W (AES)
Program power	900W
Nominal impedance	8 Ω
Frequency response	50Hz~18kHz(-10dB)
Sensitivity	98dB/W/m
Maximum SPL	>127dB
Horizon	80°
Vertical	50°
LF driver	1X12" driver
Voice coil	3"
HF driver	1X1.73" compression driver
Voice coil	1.73"

Connector


2x NEUTRIK® Speakon NL4(±1 Link, ±2 Input)

Cabinet

CNC made 15mm birch multi-layer plywood sand texture and weather-resisting protection paint

Hanging side frame

20 x M8 flying points

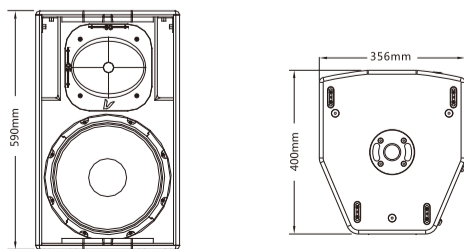

N.W/G.W 17.5kg / 21.1kg
 Product / Package Dimensions W356xH590xD400mm / W500xH700xD465mm

VOICE15v specifications

Acoustics

Power	500W (AES)
Program power	1000W
Nominal impedance	8 Ω
Frequency response	46Hz~20kHz(-10dB)
Sensitivity	98dB/W/m
Maximum SPL	>127dB
Horizon	80°
Vertical	50°
LF driver	1X15" driver
Voice coil	3"
HF driver	1X 1.73" compression driver
Voice coil	1.73"

Connector


2x NEUTRIK® Speakon NL4(±1 Link, ±2 Input)

Cabinet

CNC made 18mm birch multi-layer plywood sand texture and weather-resisting protection paint

Hanging side frame

20 x M8 flying points

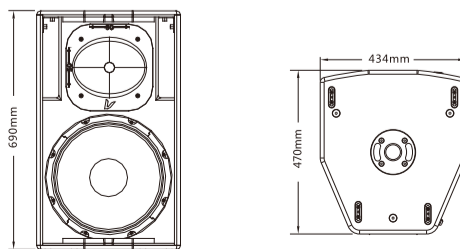

N.W/G.W 25.5kg / 30kg
 Product / Package Dimensions W434xH690xD470mm / W580xH810xD550mm